



Laser Diode LT-LD-405-300M-P

LT-LD-405-300M-P is a multimode laser diode with 300mW CW output power at 405nm. It is supplied in a 5.6mm floating mounted TO. The laser diode is suitable for the use in various opto-electronic applications.

■ Absolute Maximum Ratings (Tc=25°C)


Parameter	Symbol	Value	Unit
Optical Output Power (CW)	P _o	350	mW
Reverse Voltage	V _{ri}	2	V
Operating Case Temperature	T _c	0~+50	°C
Storage Temperature	T _{stg}	-40~+85	°C
Soldering temperature	T _{sld}	350	°C

■ Initial Electrical/Optical Characteristics (Tc=25°C)


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Threshold Current	I _{th}	-	-	140	200	mA
Operating Current	I _{op}	P _o =300mW	250	325	400	mA
Operating Voltage	V _{op}		-	4.5	5.5	V
Dominant Wavelength	λ _d		400	(406)	414	nm
Half Intensity Angle	Parallel		8	14	20	°
	Perpendicular		36	41	48	°
Differential Efficiency	η _d	$\frac{120mW}{I(300mW) - I(180mW)}$	1.4	1.8	2.2	W/A

() are reference figures.

■ Outline Dimension (Unit:mm)

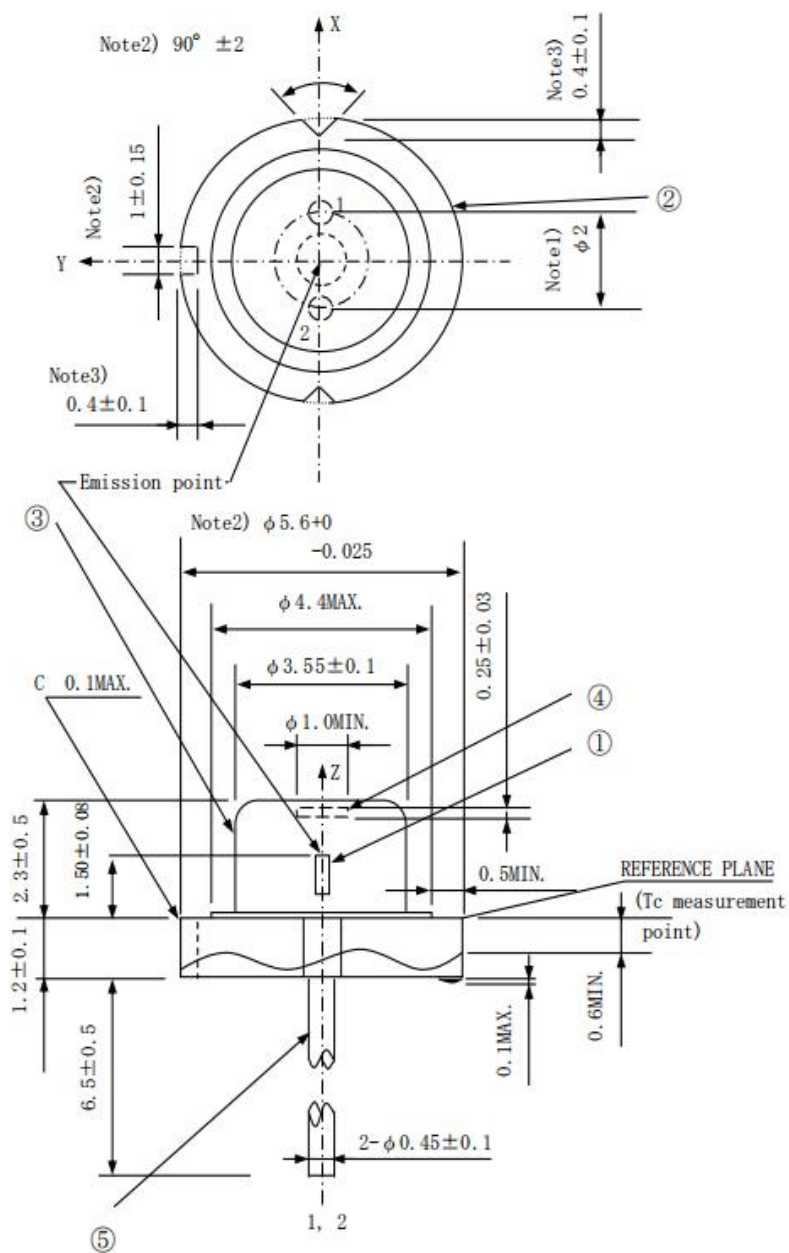


Enlarged drawing around the emission point



Center of the imaginary circle which goes through the three point around the stem

Terminal connections



■ Cautions

1. Laser light can damage the human eye and skin. Do not expose the eye and skin to any laser light directly or through optical lenses. Focused laser beam through optical instruments will increase the chance of eye hazard.
2. The laser needs a stable driver to avoid surges. The instantaneous reverse current and reverse voltage should not exceed the absolute maximum ratings, otherwise it will damage the laser diode.
3. Semiconductor lasers are sensitive to temperature, working at high temperatures will reduce the photoelectric conversion efficiency and accelerate the aging of laser diode. It should be used under adequate heat dissipation or cooling conditions.
4. The laser should be used at the rated current and rated power, the output power is too high will accelerate the aging of laser diode.
5. Semiconductor lasers are electrostatic sensitive devices, anti-static measures should be taken during storage and transportation.
6. Lasers should be stored or work in a dry, ventilated environment to prevent damage to the laser from condensation.
7. The light emitting surface (cavity surface) is the key parts of the laser diode, any handling to damage the cavity surface should be strictly prohibited. It should be ensured that the laser diode is not contaminated, and damaged in mechanical.

